

SPECIFICATIONS

MODEL	POWER	BORE	STROKE	ADVANCE	RAM SPEED		CAPACITY (TONS)	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
					PRESS	RETURN			L	W	H
HFP-350	10 HP 3 phase	14"	16"	13 IPM	3 IPM	15 IPM	350	12,000	56"	101"	114"

Standard voltages available - please specify when ordering.


H FRAME PRESS 350 Ton

STANDARD FEATURES

- ✓ **Electric / Hydraulic operation** provides smooth, consistent pressing action.
- ✓ **Open sides** to facilitate work on long pieces.
- ✓ **Flat ram nose** can be easily changed to allow the user to adapt the press to a specific job.
- ✓ **Quality Baldor motor**, low speed.
- ✓ **Low speed pump** - quiet, dependable operation.
- ✓ **Self-locking table** design eliminates lateral movement.
- ✓ **Double-acting cylinder** permits pulling as well as pressing ram action.
- ✓ **Pressure regulator** to limit the ram pressure.
- ✓ **Cylinder activation** is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ **High capacity** 20 GAL. hydraulic oil reservoir.
- ✓ **Low pressure** hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

DIMENSIONS (INCHES)

MODEL	A	B	C	D	E	F
HFP-350	114	72	96	37	24	50

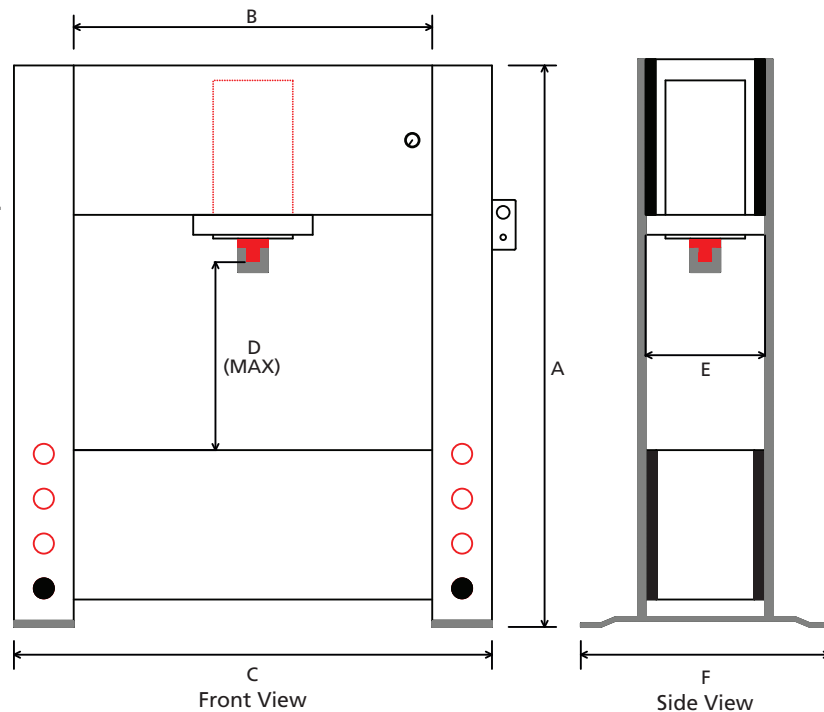

AVAILABLE OPTIONS

- FSG-350** Front safety guard for operator protection.
- FPS-350** Foot pedal-electric solenoid valve for hands-free operation, c/w electric control panel.
- ASC-350** Adjustable stroke control c/w foot pedal-electric solenoid valve and electric control panel.

Custom designs available
We Build Them your Way!