




MODEL NUMBER	KEY	CFP-200
Tons of force (maximum)		200
Approach speed (inches per minute)		65
Press speed (inches per minute)		6
Return speed (inches per minute)		78
Table (left to right)	А	35
Table (front to back)	В	22
U-Slot width	С	4
Daylight	D	20
Maximum stroke (adjustable)	Е	15
Throat	F	13
Floor to table	G	34.75
Front to back	Н	58
Height (overall)	I	102
Width	J	40
Clearance	K	6
Upper platen (left to right)	L	35
Upper platen (front to back)	М	22
Motor HP @ 1750 RPM		15 HP
Voltages available		230/460/575 3 PH. 60 HZ.

## C FRAME PRESS 200 TON

## **STANDARD FEATURES**

- $\sqrt{}$  Pressure gauge.
- $\sqrt{}$  Pressure regulator.
- $\sqrt{}$  Adjustable speed control.
- $\sqrt{}$  Adjustable stroke control.
- $\sqrt{}$  Pressure reversal switch.
- Ram travel is guided by 4 precision-ground rods.
- $\sqrt{}$ , Jog mode used for simplifying setups.
- Dual Control your choice of using:
  (1) Moveable pedestal c/w dual electric palm buttons & extra emergency stop or
   (2) Foot pedal.
- $\sqrt{}$  P.L.C. programmable control system.
- $\sqrt{}$  Quality BALDOR motor, low speed.
- $\sqrt{}$ , Air-Cooled industrial oil cooler.
- All hydraulic and mechanical parts are standard in the industry, and available throughout North America.


MODEL	WEIGHT (LBS.)	SHIPPING L X	i DIME W >	
CFP-200	15,400	64"	59"	110"

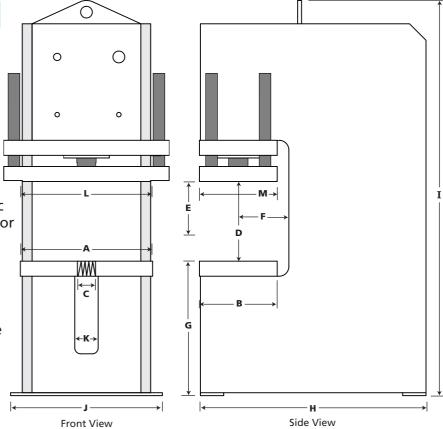





## **C FRAME PRESS 200 TON**

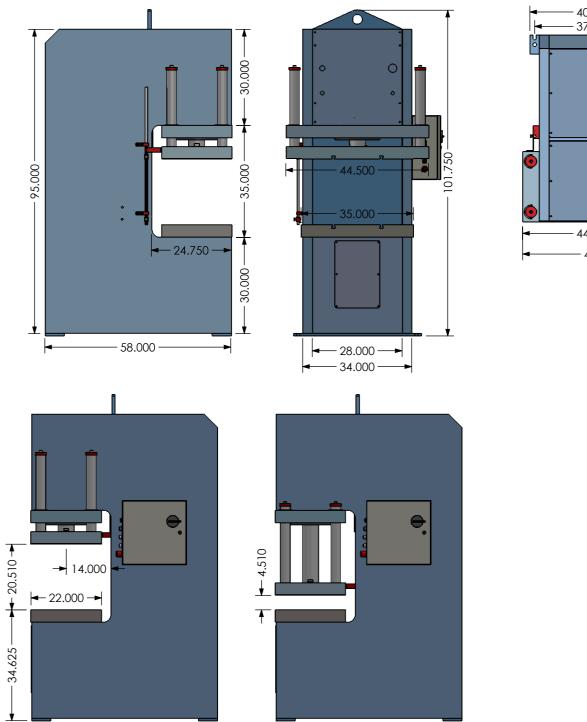

40.000 37.000 44.500 44.500 49.188 49.188





## **C FRAME PRESS 200 TON**

