

## SPECIFICATIONS

MODEL NUMBER	POWER	TABLE	BORE	STROKE	RAM SPEED			CAPACITY (TONS)	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
					ADVANCE	PRESS	RETURN			L	W	H
GSP-100 46	5 HP 3 phase	48" x 72"	9"	16"	24 IPM	6 IPM	31 IPM	100	10,000	88"	88"	80"
GSP-100 48	5 HP 3 phase	48" x 96"	9"	16"	24 IPM	6 IPM	31 IPM	100	12,000	88"	112"	80"

Standard voltages available - please specify when ordering.


## GANTRY STRAIGHTENING PRESS 100 Ton

### STANDARD FEATURES


- ✓ **Powered movable workhead** for off-center work allows operator to position the cylinder from left to right and front to back with the touch of a lever.
- ✓ **Cylinder activation** is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ **Pressure regulator** to limit the ram pressure.
- ✓ **Flat ram nose** can be easily changed to allow the user to adapt the press to a specific job.
- ✓ **Low pressure** hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

#### Optional:

Handheld wireless remote control with variable speed on all axis, permits the operator to move freely around the press.

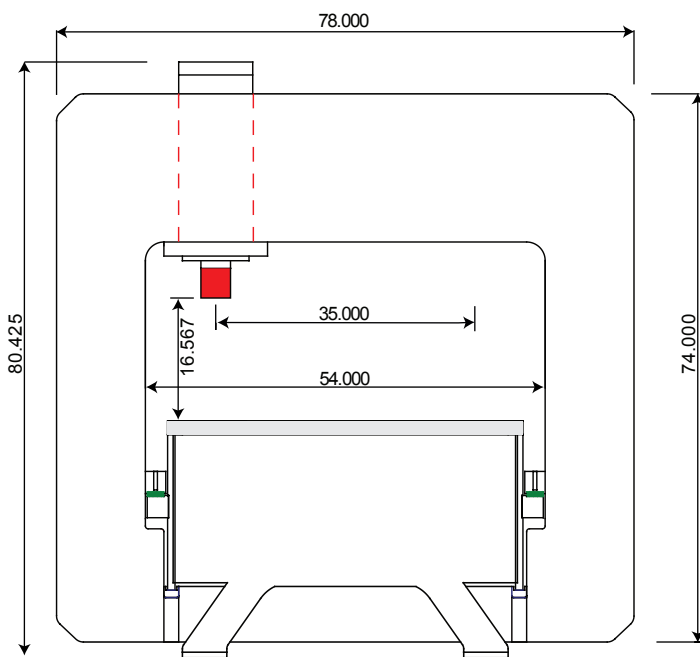

Front View

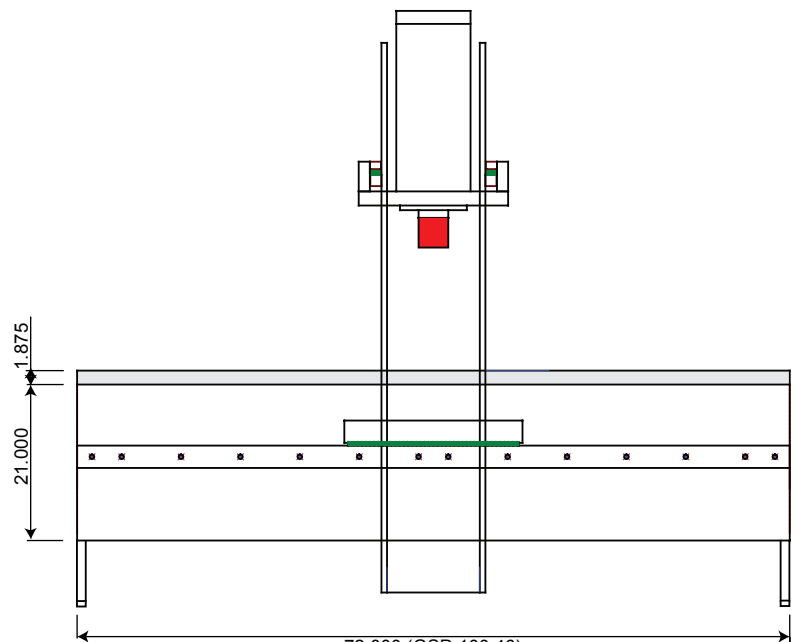

72.000 (GSP-100 46)  
96.000 (GSP-100 48)

Side View