

# PRESS MASTER




MODEL NUMBER	KEY	CFP-75	CFP-100	CFP-150
Tons of force (maximum)		75	100	150
Approach speed (inches per minute)		106	84	93
Press speed (inches per minute)		13	10	8
Return speed (inches per minute)		141	104	125
Table (left to right)	A	34	34	34
Table (front to back)	B	20	20	20
U-Slot width	C	4	4	4
Daylight	D	20.5	20.5	20.5
Maximum stroke (adjustable)	E	15	15	15
Throat	F	13	13	13
Floor to table	G	34.5	34.5	34.5
Front to back	H	58	58	58
Height (overall)	I	102	102	102
Width	J	37	38	39
Clearance	K	6	6	6
Upper platen (left to right)	L	34	34	34
Upper platen (front to back)	M	20	20	20
Motor HP @ 1750 RPM		10 HP	10 HP	15 HP
Voltages available		230 / 460 / 575 3 PH. 60 HZ.		

## C FRAME PRESSES 75 / 100 / 150 TON

### STANDARD FEATURES

- ✓ Pressure gauge.
- ✓ Pressure regulator.
- ✓ Adjustable speed control.
- ✓ Adjustable stroke control.
- ✓ Pressure reversal switch.
- ✓ Ram travel is guided by 4 precision-ground chromed rods.
- ✓ Jog mode used for simplifying setups.
- ✓ Dual Control - your choice of using:
  - (1) Moveable pedestal c/w dual electric palm buttons & extra emergency stop or
  - (2) Foot pedal.
- ✓ P.L.C. programmable control system.
- ✓ Quality BALDOR motor, low speed.
- ✓ Air-Cooled industrial oil cooler.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

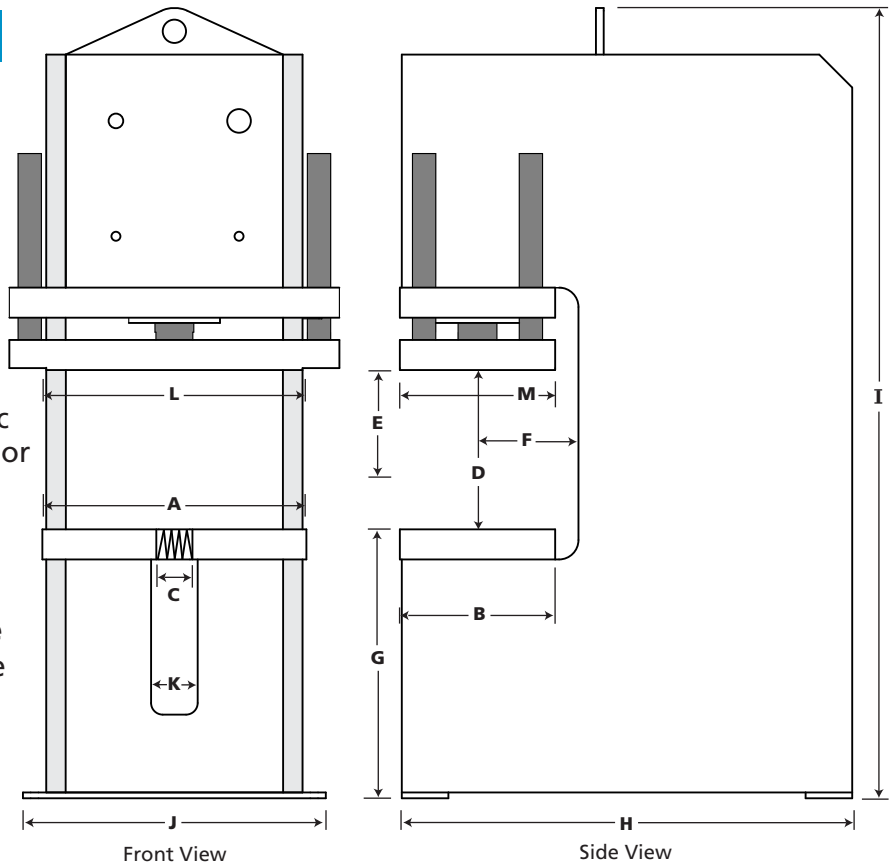

MODEL	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
		L	W	H
CFP-75	10,200	64"	59"	110"
CFP-100	11,600	64"	59"	110"
CFP-150	13,400	64"	59"	110"