

PRESS MASTER




MODEL NUMBER	KEY	CFP-75	CFP-100	CFP-150
Tons of force (maximum)		75	100	150
Approach speed (inches per minute)		106	84	86
Press speed (inches per minute)		13	10	15
Return speed (inches per minute)		141	104	102
Table (left to right)	A	34	34	34
Table (front to back)	B	20	20	20
U-Slot width	C	4	4	4
Daylight	D	20.5	20.5	20.5
Maximum stroke (adjustable)	E	15	15	15
Throat	F	13	13	13
Floor to table	G	34.5	34.5	34.5
Front to back	H	58	58	58
Height (overall)	I	102	102	102
Width	J	37	38	39
Clearance	K	6	6	6
Upper platen (left to right)	L	34	34	34
Upper platen (front to back)	M	20	20	20
Motor HP @ 1750 RPM		10 HP	10 HP	20 HP
Voltages available		230 / 460 / 575 3 PH. 60 HZ.		

C FRAME PRESSES 75 / 100 / 150 TON

STANDARD FEATURES

- ✓ Pressure gauge.
- ✓ Pressure regulator.
- ✓ Adjustable speed control.
- ✓ Adjustable stroke control.
- ✓ Pressure reversal switch.
- ✓ Ram travel is guided by 4 precision-ground chromed rods.
- ✓ Jog mode used for simplifying setups.
- ✓ Dual Control - your choice of using:
 - (1) Moveable pedestal c/w dual electric palm buttons & extra emergency stop or
 - (2) Foot pedal.
- ✓ P.L.C. programmable control system.
- ✓ Quality BALDOR motor, low speed.
- ✓ Air-Cooled industrial oil cooler.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

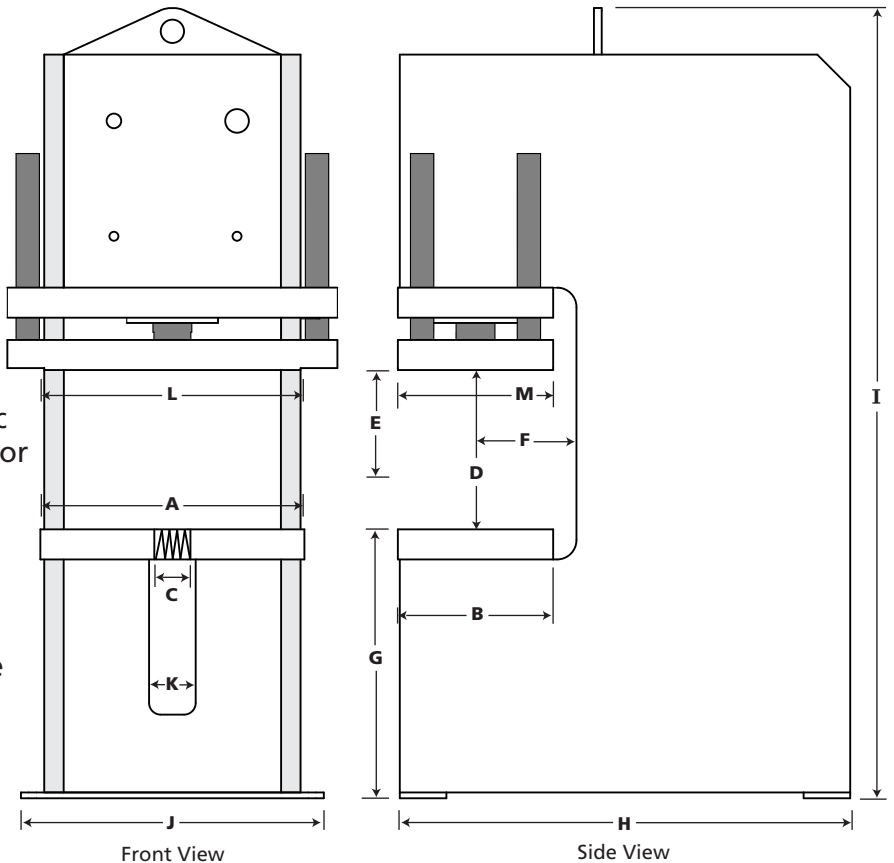

MODEL	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
		L	W	H
CFP-75	10,200	64"	59"	110"
CFP-100	11,600	64"	59"	110"
CFP-150	13,400	64"	59"	110"